


Bayfield County Forestry & Parks Department

Forester: J. Neitzel, O'Krueg, Holmes, Amman			Acres: 70	Estimated Volumes			
Twp: 51	Range: 4	Sec: 16 and 17	Compartment: 7	Species	Whole Tree	Round Wood	Logs
Township: Russell			Stand: 5 and 31		Tons	Cords	MBF
Soil: Text	Reforestation Code: NR		Tract Number: 62-14	Mixed Hardwood	4310*	1530	22**
Topography: Gentle Rolling			Contract Number:	Aspen	1622	574	
				Red Oak	429	127	22

* approx. 83% Maple, 8% Y.Birch, 4% Basswood, 2% W.Birch, 1% Ash, 1% Balsam Fir, 1% Other Hardwood
 ** approx. 77% Maple, 13% Birch, 9% Ash, 1% Other Hardwood

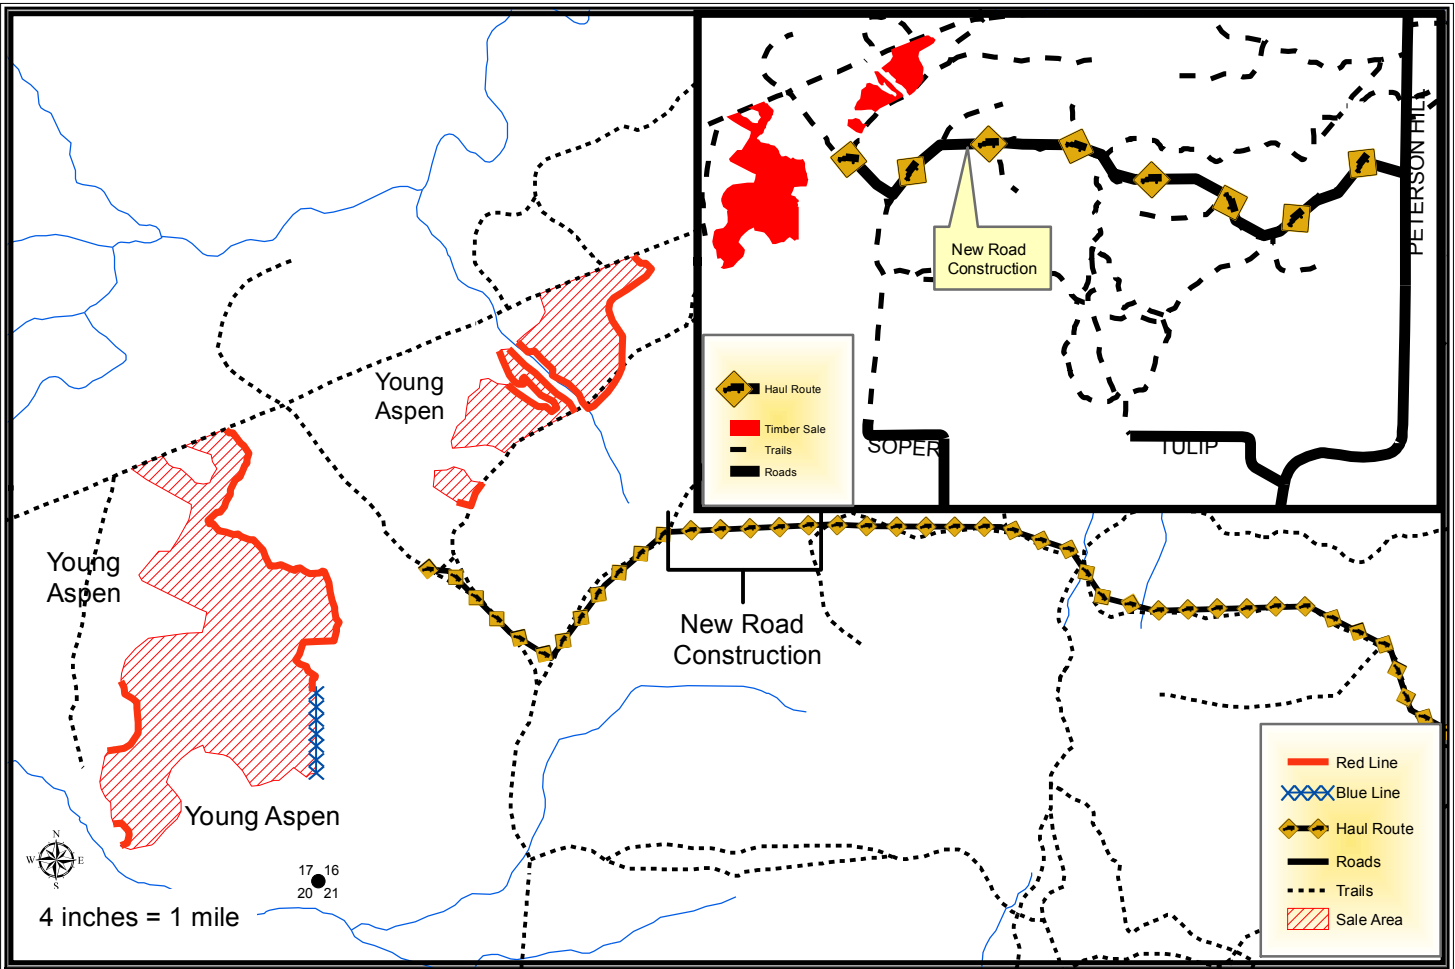

Harvest Requirements:

- Sale is a clearcut being sold on a Ticket Scale Basis
- Sale boundaries consist of red paint line, blue paint line and abrupt timber type changes.
- Harvest all merchantable hardwood except those marked with purple paint. Sever all hardwood stems 2" in diameter and greater.
- Harvest all merchantable spruce and balsam fir. Leave all other conifer.
- Do not cut snags except for those that pose a safety hazard.
- The blue line indicates private property. No equipment or felled trees may cross the blue line.
- Sale operation may only occur when the ground is frozen unless written permission is granted by Bayfield County.
- Do not damage any survey monumentation.
- **Total length of the access road system is approximately 2 miles. Approximately a quarter mile of new road will need to be constructed. The existing road will need improvement (See Attached Peterson Hill Road Project Map for Specifications).**
- To comply with the Best Management Practices for Invasive Species: Prior to moving equipment onto or off of the sale area, scrape or brush soil and debris from exterior surfaces to the extent practical.
- Decking of wood along town roads will not be allowed without permission from Bayfield County.
- If harvest will utilize the whole tree, 1 in 10 tops must be left scattered throughout the sale.
- This contract requires County authorization for all road/landing construction and places a number of other requirements on road construction and closure.